




InverECO – Specifications

TECHNICAL PARAMETER

Model	Advised pool volume (m ³)	P1 (kW)	Voltage (V/Hz)	Current (A)	Qmax (m ³ /h)	Hmax (m)	Circulation Flow (m ³ /h)	
							10m	8m
DE14	20-40	0.60	220~240 50/60	2.8	18.0	14.0	9.0	14.5
DE18	30-50	0.75		3.5	21.0	16.0	14.0	18.0
DE22	40-70	1.00		4.6	25.5	18.0	18.0	22.0
DE27	60-90	1.35		6.2	28.5	20.0	24.0	27.0

OVERALL DIMENSION

Model	Packing Dimension (mm)
DE14 / DE18 / DE22 / DE27	585*255*325

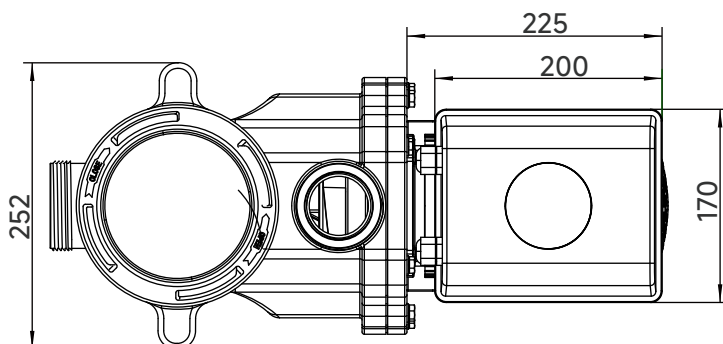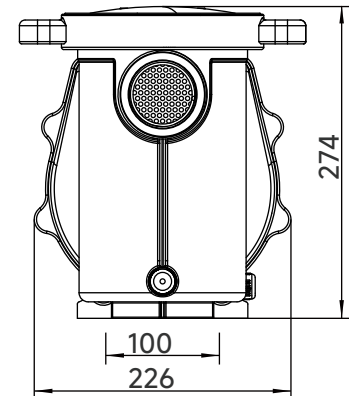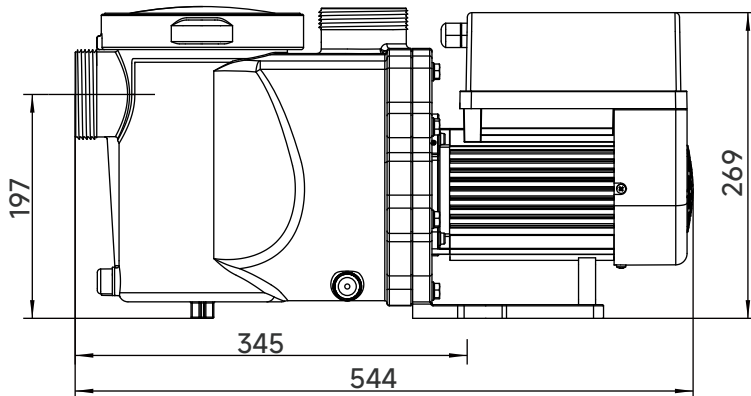

PERFORMANCE CURVE

